


BIG TANK ILLUSTRATION®

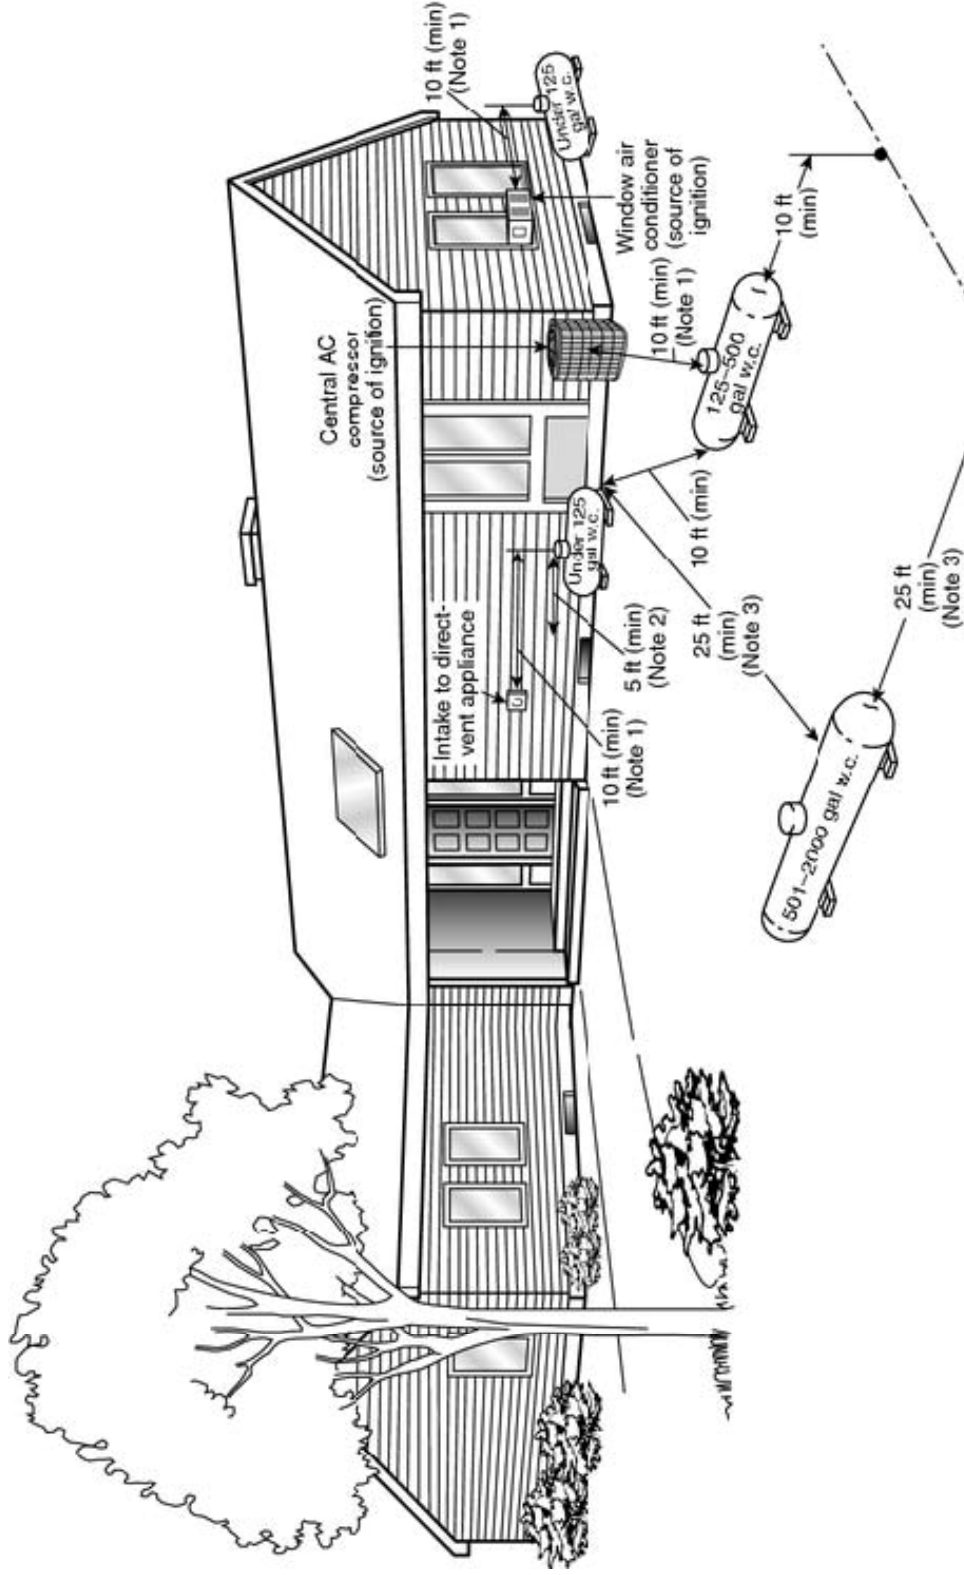

Note 1: Regardless of its size, any ASME container filled on site must be located so that the filling connection and fixed maximum liquid level gauge are at least 10 ft from any external source of ignition (e.g., open flame, window AC, compressor), intake to direct-vented gas appliance, or intake to a mechanical ventilation system. Refer to 6.3.10.

Note 2: Refer to 6.3.9.

Note 3: This distance can be reduced to no less than 10 ft for a single container of 1200 gal (4.5 m³) water capacity or less, provided such container is at least 25 ft from any other LP-Gas container of more than 125 gal (0.5 m³) water capacity. Refer to 6.3.3.

©Reprinted with permission from NFPA 58-2008 *Liquefied Petroleum Gas Code* Copyright © 2008, National Fire Protection Association, Quincy, MA. This reprint is not the complete and official position of the NFPA on the referenced subject, which is represented only by the standard in its entirety.